

Office Of the  
**No.10 MARAIKURA GRAM PANCHAYAT**

DEBINAGAR , RAIGANJ , DIST. UTTAR DINAJPUR .



No. 108/MGP/2024

Dated - 16/08/2024


**NOTICE INVITING e-TENDER NO.**  
**07/MGP/2024-2025**

The Prodhan, No 10 Maraikura Gram Panchayat invites e-tender/ Quotation from reliable and bonafide suppliers for supplying the materials as specified below under (CFCG 15 TH FC - Un-Tied) 2024-2025 Fund (Submission of Bid through online).

**1. Details of Scheme:-**

SL NO	Name Of the Scheme/Delivery Site	Tender Amount	Earnest Money (in Rs.)	Time allowed for Delivery	Participation Charges (in R.S)	Elgibility of Bidder
1	REPAIRING ROADS UNDER MARAIKURA GP At Kathar (SOVHAN ALI HOUSE TO JABED ALI HCUSE VIA KALUYA SK HOUSE KATHAR)	299039.00	5980.00	45 days	500.00	<b>60 % Credential similar nature Work</b>
2	PCC ROAD CONC FROM BALARAM HOUSE TO BADIR ALI POND AT BASUDEVPUR SANSAD	199318.00	3985.00	45 days	250.00	
3	PCC ROAD CONC AT DEBITOLA SANSAD	247761.00	4955.00	45 days	500.00	
4	PCC ROAD CONC FROM DIPEN ROY HOUSE TO SHANKAR BARMAN HOUSE VIA UTTAM BARMAN HOUSE AT KOACHPUKUR	168510.00	3370.00	45 days	250.00	
5	PCC ROAD CONC FROM YASIN HOUSE TO HABIBUR HOUSE VIA RABIUL HOUSE TO SAFAIT HOUSE AT NASRATPUR KATABARI	216917.00	4340.00	45 days	500.00	
6	PCC ROAD CONC FROM SANTU DEY TO MUNICIPALITY ROAD AT DEBINAGAR	247761.00	4955.00	45 days	500.00	
7	PCC ROAD CONC FROM SANI MANDIR TO BAUL MATH VIA KRISHNA SHARMA HOUSE TO NAKUL SARKAR HOUSE VIA MANDIRA MANDAL TO SANTOSH MANDAL VIA MUKTI PANDEY AT BAMANKUMAR 2	230126.00	4600.00	45 days	500.00	
8	PCC ROAD CONSTRUCTION FROM LATIF HOSSAIN HOUSE TO CONCRETE ROAD AT 16 BISHA	168510.00	3370.00	45 days	250.00	
9	PCC ROAD CONC FROM RAEI.DRA BHOUSH HOUSE TO MADHUSUDHAN DAS HOUSE AT PADMAPUKUR	168510.00	3370.00	45 days	250.00	
10	PCC ROAD CONC FROM BAIDYANATH PAUL HOUSE TO LANKA PARA ASRAM VIA SUCHITRA GHOSH HOUSE AT KOTGRAM PALPARA	199318.00	3985.00	45 days	250.00	
11	PCC ROAD CONC FROM DILIP KARMAKAR HOUSE TO CHAMELI MAHATO HOUSE AT KOTGRAM 2	199318.00	3985.00	45 days	250.00	
12	PCC ROAD CONC MANGLU SK HOUSE TO NAJRUL SK HOJSE VIA TAJUDDIN ALI LAND AT BHATGHARA 2	199318.00	3985.00	45 days	250.00	
13	PCC ROAD CONC FROM MANSUL ALI HOUSE TO KHOTIBUL ALI HOUSE AT VITY	199318.00	3985.00	45 days	250.00	
14	PCC ROAD CONC FROM HEMENTA BARMAN HOUSE TO END OF MARAIKURA GRAM PANCHAYAT	247761.00	4955.00	45 days	500.00	

1. Cost of Participation Charge (Non Refundable) For Less than of Estimate- 200000 (Participation Charge Should be 250) and For more than 200000 (Participation Charge Should be 500) , is to be submitted in favor of Prodhan No 10 Maraikura Gram Panchayat, payable at PNB Debinagar **Account No. 1087010106196 IFSC PUNB0108720** Branch remitted through RTGS/NEFT, Scanned copies of the Deposit slip receipt of the same should be uploaded as statutory Document/Technical File, falling which the application will be Rejected
2. In the event of e-filing, intending bidder may download the tender documents from the website:// <https://wbenders.gov.in> directly with the help of Digital Signature Certificate and Earnest Money be remitted through RTGS/NEFT issued from any bank in favour of Prodhan, No 10 Maraikura Gram Panchayat, payable at PNB Debinagar **Account No. 1087010106196 IFSC PUNB0108720** Branch and also to be documented through e-filing.
3. **Any Type of Online Payment Through U.P.I is not acceptable (If any one Send money through U.P.I Than their Participation Charge and Earnest Money Will be not acceptable) the application will be Rejected.**



Prodhan

No.10 Maraikura G. P.



- 4 Original copy of the Bidder's Bid (upload 2 copies) must be submitted fully to the L-1 Bidder at the office of the Proddhan, No 10 Maraikura Gram Panchayat, Debinagar, Raiganj, Uttar Dinajpur.
- 5 Both Technical Bid and Financial Bid are to be submitted in the form of Technical Bidder and Financial Bidder respectively. Both digitally signed on the website: <https://wbidders.gov.in>
- 6 Both Technical Bid and Financial Bid should be submitted online on or before 17/08/2024 at 14:00.
- 7 The Financial Bid of the prospective tenderer will be considered only if the Technical Bid of the tenderer found qualified by the Tender Committee, formed by **The Proddhan, No 10 Maraikura Gram Panchayat**. The decision of the Tender Committee, will be final and absolute in this respect. The list of the Qualified Bidders will be displayed in the website and also in the Notice Board of the office of the **Proddhan, No 10 Maraikura Gram Panchayat**, Debinagar, Raiganj, Uttar Dinajpur.
- 8 Bid shall remain valid for a period not less than 120 (One Hundred Twenty) days after the deadline date for Financial Bid submission. If the bidder withdraws the bid during the validity period of bid, the earnest money as deposited will be forfeited forthwith without assigning any reason thereof.

**1 Date and Time Schedule:-**

Sl. No.	Activity	Date and Time
1	Date of uploading of NIT & Other Documents online (Publishing Date)	17/08/2024 at 13:00
2	Documents download start date (Online)	17/08/2024 at 13:00
3	Documents download end date (Online)	27/08/2024 at 13:00
4	Bid submission start date (Online)	17/08/2024 at 14:00
5	Bid submission closing date (Online)	27/08/2024 at 14:00
6	Bid opening date for Technical Proposals (Online) after	29/08/2024 at 14:00
7	Uploading of Technical Bid Evaluation Sheet	To Be Latter
8	Bid opening date for Financial Proposals (Online)	To Be Latter
9	Uploading of Financial Bid Evaluation Sheet	To Be Latter

**1 LOCATION OF CRITICAL EVENT Bid Opening:-**

**Chamber of the : Proddhan, No 10 Maraikura Gram Panchayat, Debinagar, Raiganj, Uttar Dinajpur**

- 2 A) Earnest Money :- A) The amount of Earnest Money is to be submitted in the shape of NEFT/RTGS issued from any Bank drawn in favor of the "Proddhan, No 10 Maraikura Gram Panchayat, at PNB Debinagar Branch **Account No. 1087010106196 IFSC PUNB0108720**. At the time of uploading the tender, the intending tenderers should upload a scanned copy of RTGS/NEFT Bank Received Challan along with the tender. However, such RTGS/NEFT Bank Received Challan shall invariably have to be deposited by the L-1 Bidder after opening of the Financial Bid and before receiving of work order. Any tender without such Demand Draft shall be treated as informal and shall automatically stand cancelled.
- 3 The Bidder, at his own responsibility and risk is encouraged to visit and examine the site of works and its surrounding and obtains all information that may be necessary for preparing the Bid and entering into a contract for the work as mentioned in the Notice Inviting e-Tender, before submit in offer with full satisfaction. The costs of visiting the sites shall be at own expenses.
- 4 The intending tenderers are required to quote the rate online only. No offline tender will be submitted.
- 5 Tenderer shall have to comply with the provisions of a) the contract labour (Regulation Abolition) Act, 1970 b) Apprentice Act, 1961 and c) minimum wages Act, 1948 of the notification thereof or any other laws relating thereto and the rules made and ordered issued there under from time to time.
- 6 During the scrutiny, if it comes to the notice that the credential(s) and / or any other paper(s) of any bidder has/have been found incorrect /manufactured/fabricated, the said bidder will not be allowed to participate in the tender and that application will be outrightly rejected.
- 7 The Notice Inviting Authority i.e. the "Proddhan, No 10 Maraikura Gram Panchayat, may verify the documents submitted by the bidders comparing with the originals after opening the Technical Bid. After verification, if it is found that the document(s) submitted by any tendered is / are either manufactured of false or fail nag of submit in original papers on a particular date as directed; his Bid will be treated as cancelled.
- 8 Before issuance of work order, the tender inviting authority may verify online submitted document sin original of the lowest bidder. After verification nity is found that the submitted documents are either manufactured or false in that case work order will not issue under any circumstances. Legal action also been taken against the bidder.
- 9 The tenderers should, if so desired by the Proddhan, No 10 Maraikura Gram Panchayat, submit his analysis to justify the rate quoted by him.
- 10 If the date stall on holy days or on days of bandh or natural calamity, the dates defer to next working days.
- 11 The intending tenderer is required to quote the rate in figures as well as in words as percentage above



- /below/ at per with the relevant process schedule of rates.
- 12 Conditional / Incomplete tender will not be allowed
- 13 The accepting authority reserves the right to reject any or all the tenders without assigning any reason whatsoever and he will not be bound to accept either the lowest tender or any of the tenders.
- 14 Instruction to Bidders (General Guidelines for e-Tendering)
- A. Registration of Contractor: - Any contractor willing to take part in the process of e-tendering will have to be enrolled and registered with the Government-Procurement System, through logging on to <https://wbttenders.gov.in>.
- B. Digital Signature Certificate (DSC): - Each contractor is required to obtain a class-II or class-III Digital Signature Certificate (DSC) for submission of tenders, from the approved service provider of the National Information Centre (NIC) on payment of requisite amount. Details are available at the website stated in Clause - 2 of Guideline to Bidder. DSC is given as a USB e-Tender.
- C. The contractor can search and download NIT & Tender Documents electronically from computer on logging on to the website mentioned in Clause -2 using the Digital Signature Certificate. This is the only mode of collection of Tender Documents.
- D. Submission of Tenders: - Tenders are to be submitted through online to the website stated in Clause -2 in two folders at a time for each work - one in Technical Proposal and the other in Financial Proposal before the prescribed date and time using Digital Signature Certificate (DSC). The documents are to be uploaded (virus scanned copy) duly signed digitally. The documents will get encrypted (transformed) into a non-readable format).
- E. Technical Proposal:- The Technical Proposal should contain scanned copies of the following in one folder
- The tenderers have to submit the following documents -
    - Trade License up-to-date.
    - PAN Card.
    - IT Return Certificate for the last Financial Year.
    - GST Registration with Certificate (update return).
    - Professional Tax Clearance Certificate with updated challan.
  - The tenderer should disclose if there is any pending litigation upon the firm, which may have implications on the liquidity of the firm.
  - Submit with tax invoice Bill will be paid with adding GST & CSS as Applicable.
  - The tenderer would have to disclose if they are black-listed by any Govt. Deptt. / Semi Govt. Deptt. / Autonomous Bodies/ PSUs etc.
  - Registered Deed of Partnership Firm, if applicable is to be uploaded.
  - Form - I & AFFIDAVIT - "Y" by the tenderer (specimen is attached) is to be uploaded.
  - Essential Credentials -
    - The tenderer should have experience in similar type of work. At least 60% credential of 1 (One) such works in last 5 years is required. Only in the form of completion/ payment certificate.
    - Yearly turnover should not be less than the estimated amount of the work/works applied for.
- F. i) Opening of Technical Proposal: - Technical proposal will be opened by the Pradhan 10 No. Maraikura Gram Panchaya, Raiganj, Uttar Dinajpur the authorized representative of him electronically from the website state during their Digital Signature Certificate.  
ii) Intending tenderer may remain present if they desire so.
- G. Financial Proposal:-
- The Financial Proposal should contain the following documents in one cover (Folder) i.e. Bill of Quantities (BOQ). The contractor is to quote the rate (Offering Below/AT PAR) online through Computer in the space marked for quoting rate in the BOQ.
  - Only downloaded copies of the above documents are to be uploaded (virus scanned) and Digitally Signed by the contractor.
- 15 Terms of Payment:-
- A. Payment will be made by this office on submission of bill complete in all respect.
- B. The payment will be made by A/C Payee Cheque / as per Govt. norms.
- C. Payment shall be released only after due certification from the Competent Authority that work has been done satisfactorily.
- D. Any prayer for revision of rate within contract period shall not be entertained and the contract shall be liable to be cancelled.
- E. If the tenderer fails to supply the items or execute the work as per work order/agreement/contract, necessary penal action to be imposed as per the terms and condition.
- F. Payment will be made subject to availability of fund.
- 16 Execution of Agreement:-

- A. The successful tenderer shall enter into an agreement with the **Prodhan, No 10 Maraikura Gram Panchayat** Debinagar, Raiganj, Uttar Dinajpur in prescribed format.
- B. The Agreement shall be executed within 7 (seven) days from the date of issuance of Letter of Acceptance (L.O.A.).
17. Termination: - Termination of contract is liable on the following grounds:-
- A. Canvassing in any form on the part or on behalf of the tendered.
- B. If the agency fails to execute the works at the contract rates or refuses to execute the works as mentioned in Schedule work within the scheduled date, the authority shall have the right to terminate the contract with the tenderer at any time within 24 -hours' notice for term inaction and in that case, the earnest money deposited by the tendered shall be forfeited.
- C. Incomplete submission of tender/bids.
- D. In the event of willful negligence, refusal of non -performance of the terms of the contract.
- E. In case of suppression of fact so wrongful submission credentials, the contract is liable for terms nation, after due enquiry and the tendered is liable to legal action, apart from forfeiture of earnest money.
18. As per order of District Magistrate, Uttar Dinajpur vide Order No. - 114/ MA&ME Dated -03/ 02/ 2016 following deduction was considered as just an proper to impose penalty for the delay in completing the respective work. Up to six months-1 %, above six months to one year -2 %, above one year to two years -4 %, above two years to three years- 6 %, above three years-8%.
19. Dispute settlement: - In the event of any dispute by and between the **Prodhan, No 10 Maraikura Gram Panchayat** and the tendered, the decision of the Block Development Officer, Raiganj, Uttar Dinajpur shall be final.
20. The **Prodhan, No 10 Maraikura Gram Panchayat** "reserves the right to cancel the NleT or change the date & time schedule of NleT, no claiming in this respect will be entertained.
21. Work Order Of above mention works are provided after received the fund.



**Prodhan**

**No. 10 Maraikura G. P.**

**Prodhan, No 10 Maraikura Gram Panchayat  
Debinagar, Raiganj, Uttar Dinajpur.**

Memo No.- 108(5)/MGP/2024

Dated - 16/08/2024

Copy forwarded for information and wide publicity to -

1. *Additional Executive Officer, Uttar Dinajpur Zilla Parishad.*
2. *The Sub-Divisional Officer, Raiganj, Uttar Dinajpur.*
3. *The Block Dev. Officer, Raiganj, Uttar Dinajpur.*
4. *The Sabhapati, Raiganj Panchayat Samity*
5. *Notice Bord*



**Prodhan**

**No. 10 Maraikura G. P.**

Sd/-

**Prodhan, No 10 Maraikura Gram Panchayat  
Debinagar, Raiganj, Uttar Dinajpur.**

**FORM- I**  
**STRUCTURE AND ORGANISATION**

Name of applicant :

Office Address :

Telephone No. :

Fax No. :

Email ID :

Name and address of Bankers :

Attach an organization chart showing the structure of the company with names of Key personnel and technical staff with Bio-data.

:

**Note:** Application covers Proprietary Firm, Partnership, Limited Company or Corporation,

**Signature of applicant including title**  
and capacity in which application is  
made.



**AFFIDAVIT - "Y"**

**(To be furnished in Non - Judicial Stamp paper of appropriate value duly notarized)**

**N.I.e.T. No.05SI No. \_\_\_\_\_ OF 2024-2025 Of The Prodhan, No10 Maraikura Gram Panchayat, Debinagar, Raiganj, UttarDinajpur**

1. I, the under-signed do certify that all the statements made in the attached documents are true and correct. In case of any information submitted is proved to be false or concealed, the application may be rejected and no objection/claim will be raised by the under-signed.
2. The under-signed also hereby certifies that neither our firm \_\_\_\_\_ nor any of its constituent partners had been debarred to participate in tender by any directorate of Govt. work during the last 5 (five) years prior to the date of this NleT/NIT.
3. The under-signed also hereby certifies that neither our firm \_\_\_\_\_ nor any of its constituent partners have failed to execute more than one works contract under any Govt. Department and that neither our firm \_\_\_\_\_ nor any of its constituent partners was terminated by any sub-rule under clause of standard Bidding Documents by the Engineer-in-Charge/ Employer during last 3 (three) years.
4. Certified that I have access to or have available liquid assets (aggregate of working capital, cash-in-hand, uncommitted Bank Guarantees) and/or credit facilities not less than 10% of the estimated cost put to tender. In this respect, I have attached necessary documents with this application. The under-signed would authorize and request any Bank, person, Firm or Corporation to furnish pertinent information as deemed necessary and/or as requested by the Department to verify this statement.
5. The under-signed understands and agrees that further qualifying information may be requested and agrees to furnish any such information at the request of the Department.
6. Certified that I have applied in the tender vide NleT no \_\_\_\_\_ of 2022-2023, Sl. no. \_\_\_\_\_ in the capacity of individual/ as a partner of a firm & I have not applied severally for the same job.
7. The under-signed also hereby certifies that the Bid shall remain valid for a period not less than 120 (One Hundred twenty) days, after the dead line date for Bid submission.
8. I, the under-signed, declare that all the statements made in the attached documents are true and correct.
9. Certified that required machineries for the works under this NleT will be installed at the working site within 10 (Ten) days from the date of issue of Work Order.
10. I / we do hereby certify that I shall bring all requisite equipment's for all the items of works as per relevant IRC / IS codes of practice and as per BOQ and as per direction of the Engineer-In-Charge at the time of execution of work at site even if upon Technical evaluation I am declared as "qualified" without having all the requisite equipment's at the time of submission of tender.
11. I, the under-signed do certify that all the statements made in the attached documents are true and correct. If any declaration submitted is found / ascertained to be incorrect / fabricated / misrepresented / fraudulent etc. accordingly tender will be liable to be cancelled / terminated immediately & I / my firm / company shall also be liable to be prosecuted under section 197, 199 & 200 of Indian Penal Code, 1860 along with section-71 & section-73 of Indian Information & Technology Act 2008 & any other applicable law for the time being in force in addition to forfeiture of Earnest Money / Security Deposit.

Date \_\_\_\_\_

Signature, name and designation  
of Authorized Signatory For and on behalf  
of (Name of the Applicant)

LENGTH- 130.00 METER.

3.10

0.3

PCC (M 20)

0.125

2.5

0.6

Existing Embankment

0.175

4

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the bank as necessary or on berm to approximate grade & camber and rolling the sub grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	130.00	2.5		325.00	m <sup>2</sup>	14.40	4680.00
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber insulating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	130.00	2.5	0.05	16.25	m <sup>3</sup>	453.49	7369.13
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b),Page no-332] For sides of road	1	130.00		0.125	16.25	m <sup>2</sup>	214.00	3477.50
4	Supplying and laying Polythene Sheet (150gm / sq m ) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	130.00	2.5		325.00	m <sup>2</sup>	24.00	7800.00
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm including breaking clods in embankment works and tri-fill up back of abutments depressions and ruts with an initial lead up to 50 m and initial lift up to : 5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	130.00	(.30+60)/2		8.775	m <sup>3</sup>	228.50	2005.09
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	130.00	2.5	0.125	40.625	m <sup>3</sup>	5511.25	223894.33
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road. (@6 met distance) [ LMR ]	22	2.50		0.125	6.875	m <sup>2</sup>	100.00	687.50
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road	1				1	no	1000.00	1000.00

Total Rs. 250913.55

Add SGST  
Add CGST  
Total including GST but excluding labour walfare cess  
Add Labour walfare cess  
Total including GST & labour walfare cess

@9% Rs. 22582.21926  
@9% Rs. 22582.21926  
Rs. 296077.99  
@1% Rs. 2960.779859  
Rs. 299038.77  
Say- 299039.00

*Nirman Sahayak*  
**Nirman Sahayak**  
No.-10 Maraikura G. P.  
Dabnagar, Raiganj, U/D.  
Signature of Nirman Sahayak

*Prodhan*  
**Prodhan**  
Signature of Prodhan G. P.  
No. 10 Maraikura G. P.



PCC ROAD CONC FROM BALARAM HOUSE TO BALRAM POND AT BASUDEVPUR SANSAD

Location: BASUDEVPUR

Year: 2024-25

Estimate No: 18/2024

Activity Road

SRP/2024

LENGTH 90.00 METER.

1.00

PCC (M 20)

0.125

2.4

0.6

Existing Embankment

3.0

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	New cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the bank as necessary or on berm to approximate grade & camber and rolling the sub grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in charge including uprooting and removing plants and jungles when and where necessary. (Ref. PWD (WB), Schedule of Rates - 2018, (Volume III: Road & Bridge Works) Item no 3.16)	1	90.00	2.4		216.00	m <sup>2</sup>	14.40	3117.60
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150mm to proper gradient and camber. Inundating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary. [ Ref. PWD (WB), SCHEDULE OF RATES - 2018, (Volume III: Road & Bridge Works) Item no 4.05, Page-245 ]	1	90.00	2.4	0.05	10.80	m <sup>3</sup>	453.49	4897.68
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required. [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.05(b), Page no-332 ] For sides of road	1	90.00		0.125	11.25	m <sup>2</sup>	214.00	2407.50
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES - effect from 01.11.2017, (Volume I: Building works) Section - I (D), Item no 3, Page no-47 ]	1	90.00	2.4		216.00	m <sup>2</sup>	24.00	5184.00
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates - 2018 Volume III : Road & Bridge Works, Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item 3.15(b) ]	1	90.00	(.30+ .60)/2		6.075	m <sup>3</sup>	228.50	1388.14
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge (excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref. PWD (WB), Schedule of Rates - 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	90.00	2.4	0.125	27.000	m <sup>3</sup>	5511.25	148803.62
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road. (@6 met distance) [ LMR ]	15	2.40	-	0.125	4.500	m <sup>2</sup>	100.00	450.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road	1				1	no	1000.00	1000.00

Total Rs. 167241.29

Add SGST  
Add CGST  
Total including GST but excluding labour walfare cess  
Add Labour walfare cess  
Total including GST & labour walfare cess


@9% Rs. 15051.71617  
@9% Rs. 15051.71617  
Rs. 197344.72  
@1% Rs. 1973.447232  
Rs. 199318.17  
Say- 199318.00

  
Nirman Sahayak  
No.-10 Maraikura G. P.  
Debnagar Raigani, H/D

  
Proddhan  
Signature of Proddhan P.  
No.10 Maraikura G. P.



LENGTH: 90.00 METER.

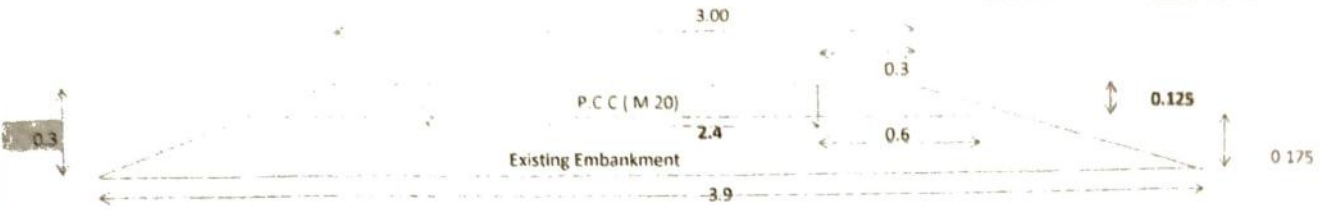


SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer -in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	90.00	2.4		216.00	m <sup>2</sup>	14.40	3110.40
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innudating each layer by water and packing and ramming layer by layer to achieve desired compaction including fighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary. [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	90.00	2.4	0.05	10.80	m <sup>3</sup>	453.49	4897.64
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required. [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332 ] For sides of road	1	90.00		0.125	11.25	m <sup>2</sup>	214.00	2407.50
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	90.00	2.4		216.00	m <sup>2</sup>	24.00	5184.00
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm, including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a).Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	90.00	(.30+ .60)/2		6.075	m <sup>3</sup>	228.50	1388.14
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	90.00	2.4	0.125	27.000	m <sup>3</sup>	5511.25	148803.62
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .(@6 met distance) [ LMR ]	15	2.40		0.125	4.500	m <sup>2</sup>	100.00	450.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00
<b>Total Rs.</b>									<b>167241.29</b>

Add SGST @9% Rs. 15051.71617  
 Add CGST @9% Rs. 15051.71617  
**Total including GST but excluding labour walefare cess** Rs. 197344.72  
 Add Labour walefare cess @1% Rs. 1973.447232  
**Total including GST & labour walefare cess** Rs. **199318.17**  
 Say- **199318.00**

  
 Nirman Sahayak  
 No. 10 Marakura G. P.  
 Signature of Nirman Sahayak

  
 Proddhan  
 Signature of Proddhan  
 No. 10 Marakura G. P.

PCC ROAD CONC FROM DILIP KARMAKAR HOUSE TO CHAMELI MAHATO HOUSE AT KOTGRAM 2

Location: KOTGRAM 2

Year: 2024-25

Fund: C.C.G (UN TIED)

Activity Code:

96764366

LENGTH: 90.00 METER.

3.00

0.3

PCC (M 20)

0.125

2.4

0.6

Existing Embankment

3.9

9.175

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub grade with power roller to proper camber and grade as per direction and satisfaction of Engineer-in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	90.00	2.4		216.00	m <sup>2</sup>	14.40	3110.40
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber including each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	90.00	2.4	0.05	10.80	m <sup>3</sup>	453.49	4897.64
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332] For sides of road	1	90.00		0.125	11.25	m <sup>2</sup>	214.00	2407.50
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	90.00	2.4		216.00	m <sup>2</sup>	24.00	5184.00
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	90.00	(.30+ .60)/2		6.075	m <sup>3</sup>	228.50	1388.14
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	90.00	2.4	0.125	27.000	m <sup>3</sup>	5511.25	148803.62
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road. @6 met distance [ LMR ]	15	2.40	-	0.125	4.500	m <sup>2</sup>	100.00	450.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00

Total Rs. 167241.29

Add SGST

@9% Rs. 15051.71617

Add CGST

@9% Rs. 15051.71617

Total including GST but excluding labour walfare cess

Rs. 197344.72

Add Labour walfare cess


@1% Rs. 1973.447232

Total including GST & labour walfare cess

Rs. 199318.17

Say- 199318.00

  
Nirman Sahayak  
No.-10 Maraikura G. P.  
Debinagar, Raiganj, U/D.

  
Proddhan  
Signature of Proddhan  
No.10 Maraikura



**ROAD CONC MANGLU SK HOUSE TO NAJRUL SK HOUSE VIA TAIJUDDIN ALI LAND AT BHATGHARA 2**

Location BHATGHARA 2

Year 2024 25

Fund C.F.C.G (UN TIF D)

Activity Road

96783680

LENGTH: **90.00 METER.**

3.00

0.3

PCC ( M 20)

0.125

0.3

2.4

0.6

Existing Embankment

0.175

3.9

**SECTIONAL ELEVATION**

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III, Road & Bridge Works) Item no 3.16 ]	1	90.00	2.4		216.00	m <sup>2</sup>	14.40	3110.40
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innudating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	90.00	2.4	0.05	10.80	m <sup>3</sup>	453.49	4897.64
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332] For sides of road	1	90.00		0.125	11.25	m <sup>2</sup>	214.00	2407.50
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	90.00	2.4		216.00	m <sup>2</sup>	24.00	5184.00
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a).Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	90.00	(.30+.60)/2		6.075	m <sup>3</sup>	228.50	1388.14
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone,both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	90.00	2.4	0.125	27.000	m <sup>3</sup>	5511.25	148803.62
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road. (@6 met distance) [ LMR ]	15	2.40	-	0.125	4.500	m <sup>2</sup>	100.00	450.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00

**Total Rs. 167241.29**

Add SGST  
Add CGST  
Total including GST but excluding labour walefare cess  
Add Labour walefare cess  
Total including GST & labour walefare cess

@9% Rs. 15051.71617  
@9% Rs. 15051.71617  
Rs. 197344.72  
@1% Rs. 1973.447232  
Rs. 199318.17  
Say- 199318.00

*Nirman Sahayak*  
**Nirman Sahayak**  
No.-10 Maraikura G. P.  
Dobinagar, Raiganj, U/D.

*Prodhan*  
Signature of Prodhan  
No.10 Maraikura G. P.

LENGTH 90.00 METER

1.00

0.3

P.C.C (M 20)

0.125

2.8

0.6

Existing Embankment

3.9

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the bank as necessary to form to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in charge including provision and removing plants and jungles when and where necessary. a) least up to 150 mm [ Ref PWD (WB), SCHEDULE OF RATES- 2018, (Volume III: Road & Bridge Works) Item no 3.16 ]	1	90.00	2.4		216.00	m <sup>2</sup>	14.40	3117.40
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber insulating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting gun-fing, barruating and making adequate earthen bunds where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary [ Ref PWD (WB), SCHEDULE OF RATES- 2018, (Volume III: Road & Bridge Works) Item no 4.05, Page-245 ]	1	90.00	2.4	0.05	10.80	m <sup>3</sup>	453.49	4897.64
3	Hire and labour charges for shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box-culvert, cross drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required [ Ref PWD (WB), Schedule of Rates : 2018 Volume III: Road & Bridge Works, Item no 38.05(b), Page no-392 ] For sides of road	1	90.00		0.125	11.25	m <sup>2</sup>	214.00	2407.50
4	Supplying and laying Polythene Sheet (150gm / sq m ) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017, (Volume I: Building works) Section-I (D), Item no 3, Page no-47 ]	1	90.00	2.4		216.00	m <sup>2</sup>	24.00	5184.00
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) in ordinary soil [ Ref PWD (WB), Schedule of Rates : 2018 Volume III: Road & Bridge Works, Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III: Road & Bridge Works, Item 3.15(b) ]	1	90.00	(.30+60)/2		6.075	m <sup>3</sup>	228.50	1388.14
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregate of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone both of approved quality and cement, as necessary including labour cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref. PWD (WB), Schedule of Rates : 2018 Volume III: Road & Bridge Works, Item no 18.07.(b) ]	1	90.00	2.4	0.125	27.000	m <sup>3</sup>	5511.25	148803.62
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road. (@6 met distance) [ LMR ]	15	2.40	-	0.125	4.500	m <sup>2</sup>	100.00	450.00
7	Supplying and fixing Display board made with Marble stone plate (2'x2') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road	1				1	no	1000.00	1000.00

<b>Total Rs.</b>		<b>167241.29</b>
@9%	Rs.	15051.71617
@9%	Rs.	15051.71617
	Rs.	197344.72
@1%	Rs.	1973.447232
	Rs.	199318.17
Say-		199318.00

Add SGST  
Add CGST

Total including GST but excluding labour walfare cess

Add Labour walfare cess

Total including GST & labour walfare cess

*Nirmalan Sahayak*  
Nirmalan Sahayak  
No.-10 Maraikura G. P.  
Debagarh Raigarh, Orissa

*Prady*  
Signature of Prodhan Prodhan  
No. 10 Maraikura G. P.



PCC ROAD CONC FROM HEMENTA BARMAN HOUSE TO END OF MARAIKURA GRAM PANCHAYAT

Location: TENOHARI


Year 2024-25

Fund: F.F.C.S (UN TIF D)

Activity Code

96767978

LENGTH: 112.00 METER.

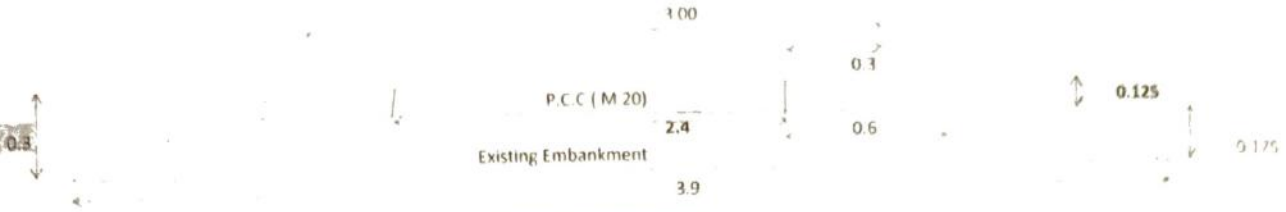

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer-in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	112.00	2.4		268.80	m <sup>2</sup>	14.40	3870.72
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber inundating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	112.00	2.4	0.05	13.44	m <sup>3</sup>	453.49	6094.84
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332] For sides of road	1	112.00		0.125	14.00	m <sup>2</sup>	214.00	2996.00
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	112.00	2.4		268.80	m <sup>2</sup>	24.00	6451.20
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	112.00	(.30+.60)/2		7.560	m <sup>3</sup>	228.50	1727.46
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	112.00	2.4	0.125	33.600	m <sup>3</sup>	5511.25	185177.83
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .( @6 met distance) [ LMR ]	19	2.40	-	0.125	5.700	m <sup>2</sup>	100.00	570.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00
								<b>Total Rs.</b>	<b>207888.05</b>

Add SGST  
Add CGST  
Total including GST but excluding labour walfare cess  
Add Labour walfare cess  
Total including GST & labour walfare cess

@9% Rs. 18709.92457  
@9% Rs. 18709.92457  
Rs. 245307.90  
@1% Rs. 2453.078999  
Rs. 247760.98  
Say- 247761.00

*Nirman Sahayak*  
**Nirman Sahayak**  
No.-10 Maraikura G. P.  
Debnagar, Raiganj, U/D.

*Proddhan*  
Signature of Proddhan  
Proddhan  
No.10 Maraikura G.P.

PCC ROAD CONC AT DEBITOLA SANSAD

Location DEBITOLA

Year 2024-25

Fund C.F.C. (UP) TIFD

Activity Code

40704038

LENGTH 112.00 METER.

3.00

0.3

P.C.C (M 20)

2.4

0.6

0.125

Existing Embankment

3.9

0.175

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the Bank as necessary or on berm to approximate grade & camber and rolling the sub grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in-charge including uprooting and removing plants and jungles when and where necessary a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	112.00	2.4		268.80	m <sup>2</sup>	14.40	3870.72
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innudating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary. [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	112.00	2.4	0.05	13.44	m <sup>3</sup>	453.49	6094.84
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction (b) Where staging is not required. [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b),Page no-332] For sides of road	1	112.00		0.125	14.00	m <sup>2</sup>	214.00	2996.00
4	Supplying and laying Polythene Sheet (150gm / sq m ) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	112.00	2.4		268.80	m <sup>2</sup>	24.00	6451.20
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a).Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	112.00	(.30+ 60)/2		7.560	m <sup>3</sup>	228.50	1727.46
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	112.00	2.4	0.125	33.600	m <sup>3</sup>	5511.25	185177.83
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .(@ 6 met distance) [ LMR ]	19	2.40	-	0.125	5.700	m <sup>2</sup>	100.00	570.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00

Total Rs. 207888.05

Add SGST	@9%	Rs.	18709.92457
Add CGST	@9%	Rs.	18709.92457
Total including GST but excluding labour walfare cess		Rs.	245307.90
Add Labour walfare cess	@1%	Rs.	2453.078999
Total including GST & labour walfare cess		Rs.	247760.98
	Say-		247761.00

*Prodan*  
Nirman Sahayak  
No.-10 Maraikura G. P.  
Debitola, Raiganj, U.P.

*Prodan*  
Signature of Prodan  
No.10 Maraikura G. P.



PCC ROAD CONC FROM SANTU DEY TO MUNICIPALITY ROAD AT DEBINAGAR

Location DEBINAGAR

Year 2024-25

Fund C.F.C. (UP TIE I)

Activity Road

98782497

LENGTH: 112.00 METER.

3.00

0.3

P.C.C (M 20)

0.125

Existing Embankment

2.4

0.6

3.9

0.175

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer -in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	112.00	2.4		268.80	m <sup>2</sup>	14.40	3870.72
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innudating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	112.00	2.4	0.05	13.44	m <sup>3</sup>	453.49	6094.84
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332] For sides of road	1	112.00		0.125	14.00	m <sup>2</sup>	214.00	2996.00
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	112.00	2.4		268.80	m <sup>2</sup>	24.00	6451.20
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	112.00	(.30+.60)/2		7.560	m <sup>3</sup>	228.50	1727.46
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	112.00	2.4	0.125	33.600	m <sup>3</sup>	5511.25	185177.83
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .(@6 met distance) [ LMR ]	19	2.40	-	0.125	5.700	m <sup>2</sup>	100.00	570.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00

Total Rs. 207888.05

Add SGST

@9% Rs. 18709.92457

Add CGST

@9% Rs. 18709.92457

Total including GST but excluding labour walfare cess

Rs. 245307.90

Add Labour walfare cess

@1% Rs. 2453.078999

Total including GST & labour walfare cess

Rs. 247760.98

Say 247761.00

*Nirman Sahayak*

Nirman Sahayak

No.-10 Maraikura G. P.

Signature of Nirman Sahayak  
Gedamagal, Raiganj, U.P.

*Pradhan*

Pradhan

Signature of Pradhan  
No. 10 Maraikura G. P.

LENGTH: 76.00 METER.

3.00

0.3

P.C.C ( M 20)

2.4

0.6

0.125

0.175

Existing Embankment

3.9

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer -in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	76.00	2.4		182.40	m <sup>2</sup>	14.40	2626.56
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innudating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	76.00	2.4	0.05	9.12	m <sup>3</sup>	453.49	4135.78
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332] For sides of road	1	76.00		0.125	9.50	m <sup>2</sup>	214.00	2033.00
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	76.00	2.4		182.40	m <sup>2</sup>	24.00	4377.60
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a).Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	76.00	(.30+.60)/2		5.130	m <sup>3</sup>	228.50	1172.21
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	76.00	2.4	0.125	22.800	m <sup>3</sup>	5511.25	125656.39
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road (.@6 met distance) [ UMR ]	13	2.40		0.125	3.900	m <sup>2</sup>	100.00	390.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00
<b>Total Rs.</b>									<b>141391.53</b>

Add SGST  
Add CGST  
Total including GST but excluding labour walfare cess  
Add Labour walfare cess  
Total including GST & labour walfare cess

@9% Rs. 12725.2381  
@9% Rs. 12725.2381  
Rs. 166842.01  
@1% Rs. 1668.420107  
Rs. 168510.43  
Say- 168510.00

  
Nirman Sahavak  
No-10 Marakura G. P.  
Signature of Nirman Sahavak  
Debinagar, Raiganj, U/D.

  
Proddhan  
Signature of Proddhan  
No.10 Marakura G. P.



ROAD CONSTRUCTION FROM LATIF HOSSAIN HOUSE TO CONCRETE ROAD AT 16 BIGHA

Year 2024-25

Fund G.F.C.G. (UN TIF D)

Activity Code

96779233

LENGTH: 76.00 METER.

3.00

0.3

P.C.C (M 20)

0.125

Existing Embankment

2.4

0.6

0.175

3.9

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer - in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	76.00	2.4		182.40	m <sup>2</sup>	14.40	2626.56
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber in each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary. [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	76.00	2.4	0.05	9.12	m <sup>3</sup>	453.49	4135.78
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required. [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332 ] For sides of road	1	76.00		0.125	9.50	m <sup>2</sup>	214.00	2033.00
4	Supplying and laying Polythene Sheet (150gm / sq m ) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	76.00	2.4		182.40	m <sup>2</sup>	24.00	4377.60
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an Initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) in ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	76.00	(.30+.60)/2		5.130	m <sup>3</sup>	228.50	1172.21
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	76.00	2.4	0.125	22.800	m <sup>3</sup>	5511.25	125656.39
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .( @6 met distance) [ LMR ]	13	2.40	-	0.125	3.900	m <sup>2</sup>	100.00	390.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00
<b>Total Rs.</b>									<b>141391.53</b>

	@9%	Rs.	12725.2381
Add SGST	@9%	Rs.	12725.2381
Add CGST		Rs.	166842.01
Total including GST but excluding labour walfare cess	@1%	Rs.	1668.420107
Add Labour walfare cess		Rs.	168510.43
<b>Total including GST &amp; labour walfare cess</b>		<b>Say-</b>	<b>168510.00</b>

*(Signature)*  
**Nirman Sahayak**  
 No.-10 Maraikura G. P.  
 Debnagar, Raiganj, U/D.

*(Signature)*  
 Prodnan  
 Signature of Prodnan: G. P.  
 No.10 Maraikura G. P.

PCC ROAD CONC FROM RABINDRA GHOSH HOUSE TO MADHUSUDHAN DAS HOUSE AT PADMAPUKUR

Location PADMAPUKUR


Year 2024 25

Fund C/CG (UN TFD)

Activity Code

9678523

LENGTH- 76.00 METER.

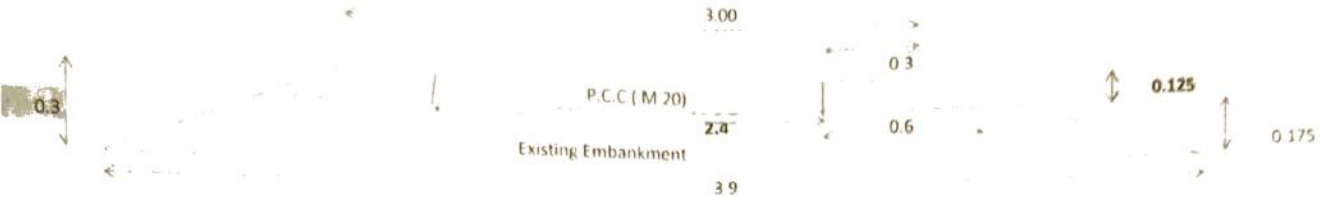

ALL DIMENSIONS ARE IN MET.

SECTIONAL ELEVATION

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	76.00	2.4		182.40	m <sup>2</sup>	14.40	2626.56
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innudating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	76.00	2.4	0.05	9.12	m <sup>3</sup>	453.49	4135.78
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor stru:cture including culvert, box culvert cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332] For sides of road	1	76.00		0.125	9.50	m <sup>2</sup>	214.00	2033.00
4	Supplying and laying Polythene Sheet (150gm / sq.m) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	76.00	2.4		182.40	m <sup>2</sup>	24.00	4377.60
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an Initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a).Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	76.00	(.30+.60)/2		5.130	m <sup>3</sup>	228.50	1172.21
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	76.00	2.4	0.125	22.800	m <sup>3</sup>	5511.25	125656.39
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .i.@6 met distance) [ LMR ]	13	2.40	-	0.125	3.900	m <sup>2</sup>	100.00	390.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00
								<b>Total Rs.</b>	<b>141391.53</b>

Add SGST  
Add CGST  
Total including GST but excluding labour walfare cess  
Add Labour walfare cess  
Total including GST & labour walfare cess

@9% Rs. 12725.2381  
@9% Rs. 12725.2381  
Rs. 166842.01  
@1% Rs. 1668.420107  
Rs. 168510.43  
Say- 168510.00

*Nirman Sahayak*  
**Nirman Sahayak**  
No.-10 Maraikura G. P.  
Dehinagar, Raiganj, U/D.

*Prodhan*  
Signature of Prodhan  
No.10 Maraikura



LENGTH: 98.00 METER.

3.00

0.3

0.3

P.C.C (M 20)

2.4

0.6

Existing Embankment

0.125

0.175

3.9

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of Items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	98.00	2.4		235.20	m <sup>2</sup>	14.40	3386.88
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber innuding each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary. [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	98.00	2.4	0.05	11.76	m <sup>3</sup>	453.49	5332.98
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required. [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332 ] For sides of road	1	98.00		0.125	12.25	m <sup>2</sup>	214.00	2621.50
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	98.00	2.4		235.20	m <sup>2</sup>	24.00	5644.80
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (i) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a). Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	98.00	(.30+60)/2		6.615	m <sup>3</sup>	228.50	1511.53
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	98.00	2.4	0.125	29.400	m <sup>3</sup>	5511.25	162030.60
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road. (@6 met distance) [ LMR ]	16	2.40	-	0.125	4.800	m <sup>2</sup>	100.00	480.00
7	Supplying and Fixing Display board made with Marbel stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00

Total Rs. 182008.29

Add SGST

@9%

Rs. 16380.7465

Add CGST

@9%

Rs. 16380.7465

Total including GST but excluding labour walefare cess

Rs. 214769.79

Add Labour walefare cess

@1%

Rs. 2147.697875

Total including GST & labour walefare cess

Rs. 216917.49

Say- 216917.00

*Pradeep*

Nirman Sahayak

No.-10 Maraikura G. P.

Dighinagar Raiganj, W.D.

*Pradeep*

Signature of Pradeep

No.10 Maraikura G. P.

ROAD CONCR FROM SANI MANDIR TO BAUL MATH VIA KRISHNA SHARMA HOUSE TO NAKUJI SARKAR HOUSE VIA MANDIRA MANDAL TO SANTOSH MANDAL VIA MUKTI PANDEY AT BAMANKUMAR 2

Location BAMANKUMAR

Year 2024 25

Fund C.F.C.G (UN TIF 0)

Activity Road

00/4135

LENGTH- 104.00 METER.

3.00

0.3

P.C.C ( M 20)

0.125

Existing Embankment

2.4

0.6

0.175

3.9

SECTIONAL ELEVATION

ALL DIMENSIONS ARE IN MET.

NOT TO SCALE

Sl. No.	Description of items	No.	Length	Bredth	Depth	Quantity	unit	Rate	Amount
1	Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer -in-charge including uprooting and removing plants and jungles when and where necessary. a) depth upto 150 mm [ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 3.16 ]	1	104.00	2.4		249.60	m <sup>2</sup>	14.40	3594.24
2	Supplying spreading and compacting sand to required thickness in layers not exceeding 150 mm to proper gradient and camber inuddating each layer by water and packing and ramming layer by layer to achieve desired compaction including lighting guarding, barricating and making adequate earthen bundh where necessary curing with water as per direction mending cracks and depressions by ramming wherever necessary.[ Ref. PWD (WB), SCHEDULE OF RATES- 2018,(Volume III: Road & Bridge Works) Item no 4.05,Page-245 ]	1	104.00	2.4	0.05	12.48	m <sup>3</sup>	453.49	5659.49
3	Hire and labour charges for Shuttering with or without staging upto 4.0 m height using approved stout props with wooden planks/ply wood/steel sheet plate with required bracing for any kind of plain or reinforced concrete works in all sorts of minor structure including culvert, box culvert, cross-drain etc. The rate is inclusive of fitting, fixing and striking out after completion of work as per specification and direction. (b) Where staging is not required.[ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item no 18.05(b) ,Page no-332 ] For sides of road	1	104.00		0.125	13.00	m <sup>2</sup>	214.00	2782.00
4	Supplying and laying Polythene Sheet (150gm / sq.m.) over damp proof course or below flooring or roof terracing or in foundation or in foundation trenches. [Ref. PWD (WB), SCHEDULE OF RATES- effect from 01.11.2017,(Volume I: Building works) Section -I (D), Item no 3,Page no-47 ]	1	104.00	2.4		249.60	m <sup>2</sup>	24.00	5990.40
5	Earthwork in excavation from borrow pits (land owned/arranged by the Contractor) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (f) In ordinary soil [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.01 ] Extra for carriage of all kinds of earth by Mechanical Transport (a) Carriage up to total lead of 2.0 KM [ Ref. PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works,Item 3.15(b) ]	1	104.00	(.30+.60)/2		7.020	m <sup>3</sup>	228.50	1604.07
6	Providing and laying Design Mix concrete for plain/ reinforced concrete work in any part of bridge(excluding bottom plugging) with coarse aggregates of appropriate nominal size and grading, fine aggregate (sand) conforming to proper grading zone, both of approved quality and cement, as necessary, including labour, cost and carriage of all material sand including preparation of design mix, approval of the same by the Engineer-in-Charge and cost for quality control, sampling, testing etc. all complete but excluding cost of labour and materials for formwork & reinforcement works. (b) M 20 Grade using concrete mixer [Ref.PWD (WB), Schedule of Rates : 2018 Volume III : Road & Bridge Works, Item no 18.07.(b) ]	1	104.00	2.4	0.125	31.200	m <sup>3</sup>	5511.25	171950.84
7	Supplying and laying of 20 mm thick thermocol in the Expansion Joint of PCC/RCC Road .(@6 met distance) [ LMR ]	17	2.40		0.125	5.100	m <sup>2</sup>	100.00	510.00
7	Supplying and Fixing Display board made with Marble stone plate (2'x1') including writing scheme details as per instruction of EIC and fixing on the surface of proposed road.	1				1	no	1000.00	1000.00

Total Rs. 193091.05

Add SGST

@9% Rs. 17378.19425

Add CGST

@9% Rs. 17378.19425

Total including GST but excluding labour walefare cess

Rs. 227847.44

Add Labour walefare cess

@1% Rs. 2278.474357

Total including GST & labour walefare cess

Rs. 230125.91

Say- 230126.00

*Nirman Sahayak*  
**Nirman Sahayak**  
No.-10 Maraikura G. P.  
Debnagar, Raigarh, U/D.

*Pradip*  
Pradip  
Signature of Pradip  
No.-10 Maraikura G. P.